

PRODUCT SPEC SHEET BOOKLET

Collection of Our Hoist System and Truck Bodies

AUGUST 2023



HOIST SYSTEM





Body Hold Downs

Universal design to secure multiple body lengths* with one system 'Bodies must be system length or shorter



Hook Storage

Integrated cable hook stowing on both sides of system



Pendant Control

Simple design for single-handed operation



Swivel Hook

Reduces cable stiffness for improved cable spooling and body attachment



Slide Pads

Provide low friction body support and reduced wear on the system/body rails



Body Rollers

Single piece, pre-lubricated and bolt-on design for smooth rolling



Electronics System

Fully enclosed and waterproof junction box with an IP 66 rating



V Roller

Poly material to reduce excessive wear and extends cable life



Pump Cover

Provides additional protection to the pump












H Series is a full hydraulic hoist system built for heavy duty workloads and is ideal for class 5-7 chassis cab vehicles with a GVWR of 16,001lbs-33,000lbs.

E Series is an electric powered hydraulic hoist system built for medium duty workloads and is ideal for class 4-7 chassis cab vehicles with a GVWR of 13,500lbs-26,000lbs. The system is designed to handle six fully loaded winch draws per day.*

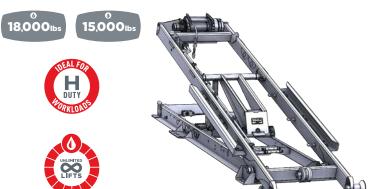





Model Name	Dumping Capacity (tons)	Minimum CEF (in.)	Winch Capacity (lbs)	Overhang Length (in.)	Typical CA (in.)
11-4016-15H-10T	10.3	132" (11')	15,000	18"	84"-96"
11-5020-18H-14T	14	132" (11')	18,000	18"	84"-96″
14-5020-18H-10T	10.3	168" (14')	18,000	18"	120"-138"

Specifications are subject to change without notice. The Gross Vehicle Weight (GVW) or Gross axle weight rating (GAWR) will limit the operating capacity of the vehicle upfitted with a hoist system. For Switch-N-Go⁺ product warranty information, please refer switchngo.com/warranty.

Model Name	Dumping Capacity (tons)	Minimum CEF (in.)	Winch Capacity (Ibs)	Overhang Length (in.)	Typical CA (in.)
10-4016-15E-11T	10.8	120" (10')	15,000	18"	72"-84"
11-4016-15E-10T	10.3	132" (11')	15,000	18"	84"-96"
11-4020-15E-12T	12.6	132" (11')	15,000	18"	84"-96"
11-5020-15E-14T	14.0	132" (11')	15,000	18"	84"-96"
12-4020-15E-11T	11.3	144" (12')	15,000	18"	96"-108"
13-4020-15E-10T	10.3	156" (13')	15,000	18"	108"-120"
14-4020-15E-9T	9.3	168" (14')	15,000	18"	120"-138"
14-5020-15E-10T	10.3	168" (14')	15,000	18"	120"-138"

- * A fully loaded winch draw is equal to the rating of the winch, which is 15,000lbs. If you are loading 15,000lbs (body and payload), the system can pull six loads per day. If you are loading a lesser weight, the system will be able to pull more than six loads per day. For example, if your load is 10,000lbs (body and payload), the system can pull approximately 10 loads per day.
- Refer to your vehicle operator guide for manufacturer recommendations on GVWR

OPTIONS

- · Wireless Remote
- Compatible Gooseneck

FEATURES

- Ideal for chassis cab vehicles with a GVWR of 13,500-33,000lbs
- Compatible with vehicles ranging from 60" CA to 138" CA
- Bolt on design allows for easy transfer between chassis
- Easy single handed operator controls with in-cab and on-hoist connection points
- Variety of dump capacities up to 14 tons
- Hoist System can raise up to 50° dump angle
- Strong, lightweight system to maximize truck payload
- Self-engaging front body lock to secure body during transport and dumping



DUMP BODY







FEATURES

- High quality zinc prime & powder coated finish
- Ramp gate for drive-on convenience
- Accepts underbody salt spreader
- 12" side height & 24" tailgate height
- Optional extended board pockets
- Standard 6" steel dump body ground rollers
- · Custom options available

FIND A DEALER IN YOUR AREA









18" Cab Shield (optional)








Double Acting Tailgate

	STANDARD DUTY	HEAVY DUTY	
FLOOR	10 GA STEEL	3/16" STEEL	
CROSSMEMBERS	3" STRUCTURAL CHANNEL 16" ON CENTER	3" STRUCTURAL CHANNEL 12" ON CENTER	
SIDE	12 GA STEEL	10 GA STEEL	
TOP RAIL	3" X 3" X 1/8" TUBING		
BULKHEAD	INSIDE HEIGHT 39", 44", OR 51"		
TAILGATE	2" X 2" X 3/16" TUBING & 10 GA SHEET		
OPTIONS	DROP DOWN SIDES / 18" CAB SHIELD / COAL CHUTE / WELDED D-RINGS		





ALUMINUM

DUMP BODY





- · Lightweight build for additional payload
- Superior corrosion resistance
- Double acting ramp/dump gate
- Manual front release tailgate
- Single piece floor
- Double walled sides
- Compatible with 11' Switch-N-Go® hoist systems








Drop Down Sides (optional)



Double Acting Ramp/Dump Gate (Not recommended for heavy equipment)

	BODY DETAILS
FLOOR	5052 ALUMINUM (1/4")
CROSS MEMBER SPACING	3" I-BEAMS ON 14 3/4" CENTERS
SIDES/FRONT/TAILGATE	5052 ALUMINUM
TAILGATE HEIGHT	18"
SIDE HEIGHT	12"
BULKHEAD	INSIDE HEIGHT 38" WITH WINDOW (48" FOR HIGH TRUCK CABS)
BOARD POCKET HEIGHTS	TAILGATE/BULKHEAD: 6"
VOLUME	3 CUBIC YARDS
OPTIONS	FOLD DOWN SIDES





STAINLESS STEEL







- **Superior Corrosion Protection**
- Double Acting Tailgate
- Manual Front Release
- Bottom Painted Black












Double Acting Tailgate



Drop Down Sides (optional)

	11'
FLOOR	10 GA 304 STAINLESS STEEL
SIDES/FRONT/TAILGATE	10 GA 304 STAINLESS STEEL
TAILGATE HEIGHT	26"
SIDE HEIGHT	14"
BULKHEAD	INSIDE HEIGHT 39" OR 51"
BOARD POCKETS	6" HIGH
D-RINGS	1 ON EACH CORNER
OPTIONS	DROP DOWN SIDES / 18" CAB SHIELD / COAL CHUTE / WELDED D-RINGS
HOIST COMPATIBILITY	11'





DROP BOX







- High quality zinc prime & powder coated finish
- Two build grades available
- Standard 6" steel ground rollers
- Optional curb side door
- Custom options available






FIND A DEALER IN YOUR AREA







		<u> </u>	
	MEDIUM DUTY	HEAVY DUTY	
FLOOR	10 GA	3/16"	
SIDE POSTS	2-3 POSTS PER SIDE, 12 GA SHEET	30-36" ON CENTER POSTS, 12 GA SHEET	
CROSSMEMBERS	3" STRUCTURAL CHANNEL, 16" ON CENTER	3" STRUCTURAL CHANNEL, 12" ON CENTER	
TOP RAIL	3" X 3" X 1/8" TUBING		
TAILGATE	3" STRUCTURAL CHANNEL, 16" ON CENTER		
SIDE HEIGHTS	39" & 51"	36" & 48"	
SIDES/FRONT/TAILGATE	12 GA SHEET		
REAR CORNER POST	7 GA SHEET		
OPTIONS	CURBSIDE DOOR / WELDED D-RINGS CAB SHIELD		











FEATURES

- · Structural steel construction
- · Bodies are powder coated
- Body widths are 88" inside and 96" outside
- Interior side heights are 51" or 53", depending on the style chosen
- Standard 6" steel ground rollers

FIND A DEALER IN YOUR AREA







	FORMED TOP RAIL	TUBING TOP RAIL	
TOP RAIL	FORMED TOP RAIL	3" X 3" X 1/8" TUBING	
SIDE HEIGHT	53"	51"	
CROSSMEMBERS	FORMED 3" CROSSMEMBERS ON 18" CENTERS		
TAILGATE	2" X 2" X 1/8" TUBING TUBULAR FRAME WORK SINGLE SWING GATE		
SIDES/FRONT/TAILGATE	12 GA SHEET		
REAR CORNER POST	12 GA SHEET		
FLOOR	12 GA SHEET		
OPTIONS	NONE		
AVAILABLE SIZES	11' / 12' / 14'	11' / 12' / 14'	
APPROXIMATE HEAPED CUBIC YARDS	15 / 16 / 20	14 / 15 / 17	
WEIGHT (LBS)	2030 / 2160 / 2380	2080 / 2210 / 2440	

11',12' or 14'

Black powder or wet paint. No seam seal or options. May be produced in two different production facilities Location will be confirmed when ordering shipment.



ARBOR BODY WITH SECTIONAL REMOVABLE ROOF

* One Piece Removable Roof Also Available

51" side height and 39" SS tailgate pictured






ALSO AVAILABLE WITH A

ONE PIECE REMOVABLE ROOF

FEATURES

- High quality zinc prime & powder coated finish
- Removable sectional roof mounting hardware included
- Standard 6" steel ground rollers

FIND A DEALER IN YOUR AREA







24" Rear Cover Plate (Optional)



Cam-Latches for simple removal of some or all roof sections




Single Swing or Barn Doors (Not available on 8' MDRB models)



Assembly Required - Factory Install Not Available

	MEDIUM DUTY
FLOOR	10 GA
SIDE POSTS	2-3 POSTS PER SIDE, 12 GA SHEET
TAILGATE	2" x 2" x 1/8" TUBING TUBULAR FRAME WORK FORMED 12 GA SHEET
TOP RAIL	3" x 3" x 1/8" TUBING
SECTIONAL REMOVABLE ROOF	12 GA SHEET 22" HIGH WITH TOP SUPPORT 37" LONG SECTIONS - ALSO AVAILABLE INDIVIDUALLY 2" x 2" x 1/8" AND 8" ANGLE EDGE MESH VENTS ON BOTH SIDES
BULKHEAD	12 GA SHEET
OPTIONS	24" REAR COVER PLATE, BARN DOORS AVAILABLE FOR 39" GATES





ARBOR BODY WITH ONE PIECE REMOVABLE ROOF*

* Sectional Removable Roof Also Available



51" side height and 39" BD tailgate pictured






FEATURES

- High quality zinc prime & powder coated finish
- One piece roof bolted onto Arbor Body
- Standard 6" steel ground rollers

FIND A DEALER IN YOUR AREA

SWITCHNGO.COM/DEALER



SECTIONAL REMOVABLE ROOF





24" Rear Cover Plate (Optional)



One Piece Roof bolted onto Arbor Body



Single Swing or Barn Doors (Not available on 8' MDRB models)



	MEDIUM DUTY
FLOOR	10 GA
SIDE POSTS	2-3 POSTS PER SIDE, 12 GA SHEET
TAILGATE	$2" \times 2" \times 1/8"$ TUBING TUBULAR FRAME WORK FORMED 12 GA SHEET
TOP RAIL	3" x 3" x 1/8" TUBING
ONE PIECE ROOF	12 GA SHEET 22" HIGH WITH TOP SUPPORT 37" LONG SECTIONS - ALSO AVAILABLE INDIVIDUALLY 2" x 2" x 1/8" AND 8" ANGLE EDGE MESH VENTS ON BOTH SIDES (1/SIDE FOR 8'-11' LENGTHS, 2/SIDE FOR 12'-15' LENGTHS)
BULKHEAD	12 GA SHEET
OPTIONS	24" REAR COVER PLATE, BARN DOORS AVAILABLE FOR 39" GATES





FLATBED








FEATURES

- High quality zinc prime & powder coated finish
- · Lightweight design
- 24" on center stake pockets
- Lasercut window in bulkhead
- 4-Corner chain keyholes
- Low profile 4" steel ground rollers
- Custom options available

FIND A DEALER IN YOUR AREA






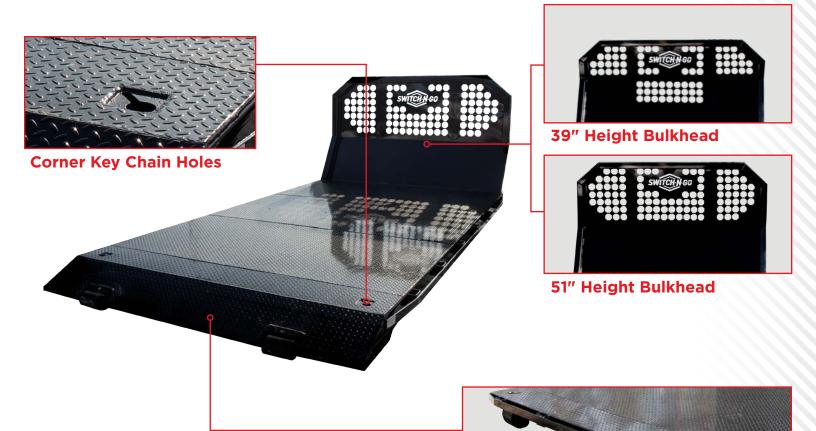

Available with or without Beavertail


SPECIFICATIONS

	9-12' LENGTHS	13-15' LENGTHS	
FLOOR	1/8" DIAMOND PLATE	3/16" DIAMOND PLATE	
OUTER RAIL	3" X 3" X 1/8" TUBING		
STAKE POCKETS	24" ON	CENTER	
RUB RAIL	3/8" X 2	' FLATBAR	
ROLLERS	INTEGRATED 4X6" WIDE GROUND ROLLERS		
CROSSMEMBERS	3" STRUCTURAL CHANNEL ON 16" CENTERS		
KEYHOLES	LOCATED IN CORNERS OF PLATFORM FLOOR		
OPTIONS	WELDED D-RINGS / STAKE SIDES / NO BEAVERTAIL		
	STANDARD BULKHEAD	HIGH BULKHEAD	
BULKHEAD WINDOW	≈ 3.8 SQ FEET AREA	≈ 4.4 SQ FEET AREA	





LANDSCAPE BODY

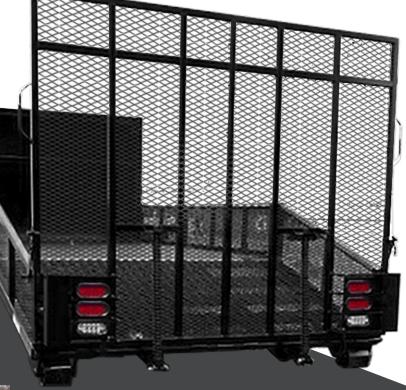





FFATURES

- Fold Down Ramp & Beaver Tail for efficient loading and unloading of equipment
- Passenger Fold down side
- 24" x 24" Lockable Top Compartment
- (4) D-Rings in corners for securing equipment
- Rear gate wired with LED lights
- High quality powder coated finish
- Available in 11', 12', and 14' lengths


FIND A DEALER IN YOUR AREA





	11'	14'
FLOOR	11 GA DIAMOND PLATE	
RAMP	11 GA EXPANDED METAL SPRING ASSISTED FOLD DOWN	
SIDES	11 GA EXPANDED METAL	
SIDE HEIGHT	16"	
CROSSMEMBERS	12" ON CENTER	
D-RINGS	4 IN CORNERS	
HOIST COMPATIBILITY	11' 14'	

*12' hoist compatible body available upon request





STORAGE BODY







FEATURES

- High quality zinc prime & powder coated finish
- Lockable security-style doors
- 72" side height & 6" peak roof
- Standard 6" steel ground rollers
- Custom options available

FIND A DEALER IN YOUR AREA







Standard Exterior Posts



Peak Roof






Internal Posts (optional)



Lockable Security Style Doors

EXTERIOR POST	12 GA WITH 5" FORMED POST ON 36-48" CENTER
INTERIOR POST	3" STRUCTURAL CHANNEL
DOORS	LOCKABLE SECURITY STYLE WITH 3" X3" SUPPORTS
CROSSMEMBERS	3" STRUCTURAL CHANNEL ON 16" CENTER
PEAK ROOF	6" HIGH 12 GA SHEET
TOP RAIL	3" X 3" X 1/8" TUBING
FLOOR	10 GA SHEET
BULKHEAD	12 GA SHEET
OPTIONS	INTERNAL SIDE POSTS / WELDED D-RINGS





VAN BODY







- Lightweight Design for Additional Payload
- Superior Corrosion Resistance
- Single Rear Roll-Up Door
- Fully Enclosed Unit for Cargo Protection
- Smooth Sides for Additional Advertising
- Available in 12', 13' & 15' lengths to be compatible with 11', 12' & 14' Switch-N-Go hoist systems.*

*Not compatible with S-Model





Lockable Rear Roll-Up Door



Interior E-Track




Bolt-on Aluminum Pullout Ladder



Grab Handles

	12'	13'	15'
FLOOR	TONGUE & GROOVE EXTRUDED ALUMINUM		
REAR ROLL-UP DOOR	86"W X 77"H		
INTERIOR SIDES	1/2" PLYWOOD WITH E-TRACK		
SIDE HEIGHT	83"		
CROSSMEMBERS	12" ON CENTER		
SYSTEM COMPATIBILITY	11'	12'	14'





SUBFRAME








FEATURES

- High quality zinc prime & powder coated finish
- · Lightweight design
- Rail Slides w/ no wheels
- Sloped front design for guaranteed operation with Switch-N-Go® system
- Ideal for custom usage upfits

FIND A DEALER IN YOUR AREA





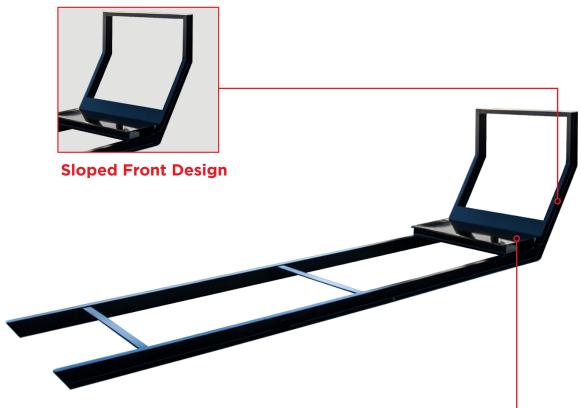



Reinforced Plate

	11' SUBFRAME	16' SUBFRAME
REINFORCED PLATE		PLATE AND RAL CHANNEL
OUTER RAIL	4" X 5.4# CHANNEL	5" X 6.7# CHANNEL
CROSSMEMBERS	3" STRUCTURAL CHA	NNEL ON 13" CENTERS
SYSTEM COMPATIBILITY	11'	14'
Specifications are subject to change without switch-N-Go* product please refer switchngo		on this or any other









FEATURES

- High quality zinc prime & powder coated finish
- Engineered to maximize legal payload
- Prevents material build-up with expanded metal cut-outs
- 16,500lb maximum load operation
- Simple framed bulkhead for visibility
- Non-slip surface with side cut-outs

FIND A DEALER IN YOUR AREA






























Sand / Salt Sprayer





SPECIFICATIONS

	9' / 11' / 12' / 14' LENGTHS
MAXIMUM LOAD LIMIT	16,500 LBS
ATTACHMENT POINTS	4 D-RINGS RATED AT 4080 LBS LOCATED IN EACH CORNER
FLOOR	1/8" DIAMOND PLATE WITH EXPANDED METAL FLOOR CUT-OUTS
LEGS	RETRACT AND STOW
9' & 11' LENGTHS ONLY	35 1/8" WIDE X 9" REAR CUTOUT





SALT SPREADER









FEATURES

- Superior Weight Distribution as compared to non-specialized upfits
- 4.8 Cubic Yard 304 Stainless Steel V-Box
- 12" Angled Front Extension
- 9" Rear Cutout for Conveyor
- Sloped Front Design
- Retractable Legs for interchangebility & storage without removing the chute
- 16,500lb maximum load operation
- Expanded metal subframe floor cut-outs to prevent material buildup

FIND A DEALER IN YOUR AREA







9" Rear Cutout for Conveyor






Available in Electric & Hydraulic Models



Retractable Legs

	11' LENGTH ONLY		
	ELECTRIC	HYDRAULIC	
WORKING LOAD LIMIT	16,500 LBS		
SPREADER CAPACITY	4.8 YD		
ATTACHMENT POINTS	4 D-RINGS RATED AT 4,080 LBS		
FLOOR	SIDE 19" WIDE EXPANDED METAL 3/4" CENTER 40" WIDE DIAMOND SHEET 1/8"		
REAR CUTOUT	35 1/8" WIDE X 9" DEEP		
LEGS	UNPIN AND RETRACT		
SPREADER SPINNER	1/2 HP, 12V MOTOR	DIRECT MOUNT HD	
SPREADER CONVEYOR	3/4 HP, 12V MOTOR	20:1 WORM GEAR BOX	





11' FLATBED SERVICE BODY







FEATURES

- All Extruded 6005 T6 Alum Box Tube Construction
- T&G Extruded Alum Flooring
- Extruded Aluminum Headboard
- 3 Vertical Service Body Compartments per Side
- Rear Service Body Tailgate
- Powder Coated White
- Manual Master Lock System
- 2 Rows of E-Track Full Length


FIND A DEALER IN YOUR AREA







	BODY DETAILS	
FLOOR	T&G EXTRUDED ALUMINUM 102" LONG x 56 3/8" WIDE CENTER	
TAILGATE	REAR SERVICE BODY TAILGATE	
LATCHES	MANUAL MASTER LOCK SYSTEM	
COMPARTMENTS	3 PER SIDE - 40 3/16" W x 34 7/16" T WELDED TO FLATBED FLOOR	
FLATBED CONSTRUCTION	G-TUBE PERIMETER / 2x3.125 CROSS MEMBERS, 12" OC / 2x3 .188 BOX TUBE LONG SILLS (GUSSETS EVERY 4' FROM FRONT TO BACK) / ALL EXTRUDED 6005 T6 ALUM / BOX TUBE CONSTRUCTION	39 5/16"
BULKHEAD	EXTRUDED ALUMINUM HEADBOARD	
D-RINGS	6 RECESSED STAINLESS STEEL D-RING, SPRING-LOADED, 4.4K LB RATING, EVENLY SPACED, 3 PER SIDE	
CARGO SECUREMENT	2 ROWS OF E-TRACK FULL / CENTER BODY LENGTH	96 1/2"
Specifications are subject to change without notice. For warranty information on this or any other		





RESIDENTIAL **TRASH BODY**









FEATURES

- 12GA structural steel construction
- 96x60" barn door tailgate standard
- Formed top rail
- Ideal for dumpster rental businesses

FIND A DEALER IN YOUR AREA







Dual Locking Mechanism

	BODY DETAILS
FLOOR	12', 12GA SHEET
TAILGATE	60" BARN DOOR: 2" x 2" x 1/8" TUBULAR FRAME WORK FORMED
SIDE	12GA SHEET SMOOTH
CROSSMEMBERS	3" x 3.5# STRUCTURAL CHANNEL AND FORMED CHANNEL ON 16" CENTERS, FORMED TOP RAIL
CAPACITY	18 CUBIC YARDS
PAINT	POWDER BLACK (WILL QUOTE OTHER COLORS)



STORAGE CONTAINER







FEATURES

- Two Lengths: 12' for 11' and 12' systems and 16' for 14' systems
- Base/Frame: Powder coated steel
- **Walls**: 0.8 mm flat lightweight powder coated steel panel
- Roof: 14 Ga powder coated rolled steel
- Floor: 19 mm plywood with waterproof fiber coating front and back
- Doors: Rear double swing with 72"W x 78"H opening

FIND A DEALER IN YOUR AREA




Ships folded and collapsed, assembly required



Switch-N-Go®
Subframe included
(ships separately)



	12'	16'
EXTERIOR	144"L X 93"W X 96"H	192"L X 93"W X 96"H
INTERIOR	140"L X 90"W X 91"H	188"L X 90"W X 91"H
FOLDED HEIGHT	17"	15"
SIZE CAPACITY	665 CU FT	895 CU FT
WEIGHT CAPACITY	7,000 LBS	10,000 LBS
BODY WEIGHT	2,200 LBS	2,500 LBS





RECYCLER BODY







FEATURES

- · High quality zinc prime & powder coated finish
- Standard 6" steel ground rollers
- · Roof with two slider lids per side (4 sliders total)
- · Roof also available to be purchased separately

FIND A DEALER IN YOUR AREA







FLOOR	10 GA, 96" WIDE X 11' LONG
SIDE POSTS	2-3 POSTS PER SIDE PER SIDE, 12 GA SHEET
CROSSMEMBERS	3" STRUCTURAL CHANNEL 16" ON CENTER
TOP RAIL	FORMED 12 GA
TAILGATE	FORMED 12GA STEEL SHEET WITH 2" X 2" X 1/8" TUBULAR FRAME WORK
SIDE HEIGHT	39"
SIDES/FRONT	12 GA SHEET
REAR CORNER POST	7 GA SHEET
GAMBREL ROOF	29"
SLIDING LIDS	2 PER SIDE / 30" EACH

